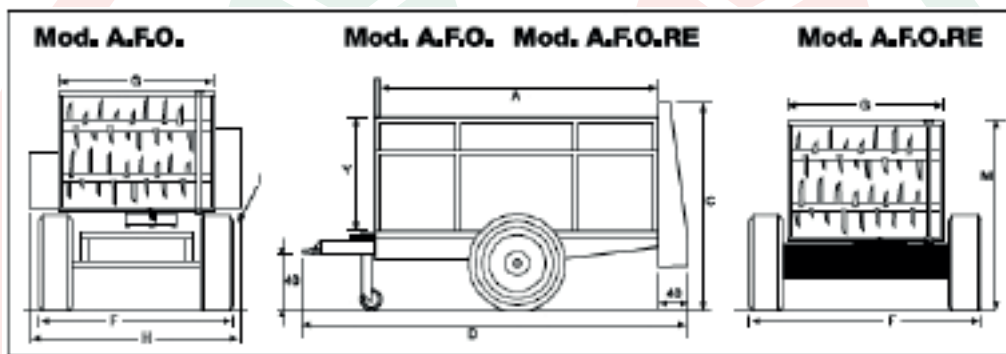




MANURE SPREADER A.F.O.

- Rear spreading
- Cut-tube profiles structure with pickled sheet steel
- Covering of floor and sides in treated larch boards
- A rigid suspension
- N° 2 balanced horizontal rollers for rear spreading
- Hydraulic chain conveyor advancement
- Guides for chain running
- Removable drawbar
- Axle without brake
- Tractor n° 1 pair of hydraulic outlets for belt chain operation - oil 30 Lt.
- Cardan shaft
- Road light kit



* EUROPEAN ROAD HOMOLOGATION



MOD.	A mm	C mm	D mm	F mm	G mm	H mm	Y mm	WHEELS	m³	Tare Kg		€	BRAKING SYSTEM COSTS	EUROPEAN ROAD HOMOLOGATION CERTIFICATE	*
A.F.O. 15 V	2500	2100	3800	1400	1150	1350	850	10/075 - 15.3 12 PR	2.2	1230	1700			Load 3.230 Kg.	X
A.F.O. 15	3000	2100	4300	1400	1150	1350	850	10/075 - 15.3 12 PR	2.8	1380	1700			Load 3.680 Kg.	X
A.F.O. 15 S	3500	2100	4800	1400	1150	1350	850	10/075 - 15.3 12 PR	3.3	1500	1700			Load 4.200 Kg.	X
A.F.O. 15 M	4000	2100	5300	1400	1150	1350	850	11/80 - 15.3 18 PR	3.38	1610	1700			Load 4.700 Kg.	X
A.F.O. 25 V	2500	2100	3800	1550	1250	1550	850	10/075 - 15.3 12 PR	3.22	1380	1900			Load 3.580 Kg.	X
A.F.O. 25	3000	2100	4300	1550	1250	1550	850	10/075 - 15.3 12 PR	3.0	1250	1900			Load 4.100 Kg.	X
A.F.O. 25 S	3500	2100	4800	1550	1250	1550	850	10/075 - 15.3 12 PR	3.5	1380	1900			Load 4.650 Kg.	X
A.F.O. 25 M	4000	2100	5300	1550	1250	1550	850	11/80 - 15.3 18 PR	3.9	1780	1900			Load 5.280 Kg.	X

MOD.	A mm	C mm	D mm	F mm	G mm	H mm	Y mm	WHEELS	m³	Tare Kg		€	BRAKING SYSTEM COSTS	EUROPEAN ROAD HOMOLOGATION CERTIFICATE	*
A.F.O. 35 V	2500	2100	2800	1550	1500	1800	850	340/55 16 PR	2.9	1760	2300			Load 4.360 Kg	X
A.F.O. 35	3000	2100	4300	1550	1500	1800	850	340/55 16 PR	3.5	1900	2300			Load 5.000 Kg	X
A.F.O. 35 S	3500	2100	4800	1600	1500	1800	850	340/55 16 PR	4.4	2050	2300			Load 5.750 Kg	X
A.F.O. 35 M	4000	2100	5300	1600	1500	1800	850	11/80 15.3 PR	4.7	2180	2300			Load 6.380 Kg	X
A.F.O. 35 X	4500	2100	5800	1600	1500	1800	850	11/80 15.3 PR	5.3	1250	2200			Load 7.000 Kg	X

COMPULSORY FOR EUROPEAN ROAD HOMOLOGATION

IMAGE	CODE	DESCRIPTION	PRICE
	SP 001	AXLE WITH MECHANICAL BRAKE	


BRAKING SYSTEM COMPULSORY FOR EUROPEAN ROAD HOMOLOGATION


	PNEUMATIC	
	HYDRAULIC WITH PEDAL	

MANURE SPREADER A.F.O. RE



* EUROPEAN ROAD HOMOLOGATION



MOD. 1300	A mm	C mm	D mm	F mm	G mm	H mm	M mm	Y mm	WHEELS	m ³	Tare Kg		€	BRAKING SYSTEM COSTS	CERTIFICATE EUROPEAN ROAD HOMOLOGATION	*
A.F.O. RE 15 V	2500	1850	3800	1800	1150	1800	1800	850	10/075 - 12 PR	2.3	1230	2500			Load 3.230 Kg.	x
A.F.O. RE 15	3000	1850	4300	1800	1150	1800	1800	850	10/075 - 12 PR	2.8	1380	2500			Load 3.680 Kg.	x
A.F.O. RE 15 S	3500	1850	4800	1800	1150	1800	1800	850	10/075 - 12 PR	3.2	1500	2500			Load 4.200 Kg.	x
A.F.O. RE 15 M	4000	1850	5300	1800	1150	1800	1800	850	11/80 - 15.3 18 PR	3.7	1610	2500			Load 4.700 Kg.	x
A.F.O. RE 25 V	2500	1850	3800	1900	1250	1900	1800	850	10/075 - 18 PR	2.5	1380	2500			Load 3.580 Kg.	
A.F.O. RE 25	3000	1850	4300	1900	1250	1900	1800	850	10/075 - 12 PR	3.0	1500	2500			Load 4.100 Kg.	x
A.F.O. RE 25 S	3500	1850	4300	1900	1250	1900	1800	850	10/075 - 12 PR	3.5	1650	2500			Load 4.650 Kg.	
A.F.O. RE 25 M	4000	1850	5300	1900	1250	1900	1800	850	11/80 - 15.3 18 PR	4.0	1780	2500			Load 5.280 Kg.	

MOD.	A mm	C mm	D mm	F mm	G mm	H mm	M mm	Y mm	WHEELS	m³	Tare Kg		€	BRAKING SYSTEM COSTS	CERTIFICATE EUROPEAN ROAD HOMOLOGATION	*
A.F.O. RE 35 V	2500	1850	2800	2100	15000	2100	1800	850	10/075 - 12 PR	2.9	1760	2700			Load 4.360 Kg.	X
A.F.O. RE 35	3000	1850	4300	2100	1500	2100	1800	850	10/075 - 12 PR	3.5	1900	2700			Load 5.000 Kg.	X
A.F.O. RE 35 S	3500	1850	4800	2100	1500	2100	1800	850	10/075 - 12 PR	4.4	2050	2700			Load 5.750 Kg.	X
A.F.O. RE 35 M	4000	1850	5300	2100	1500	2100	1800	850	11/80 - 15.3 18 PR	4.7	2180	2700			Load 6.380 Kg.	X
A.F.O. RE 35 X	4500	1850	5800	2100	1500	2100	1800	850	11/80 - 15.3 18 PR	5.3	2200	2700			Load 7.000 Kg.	X

COMPULSORY FOR EUROPEAN ROAD HOMOLOGATION

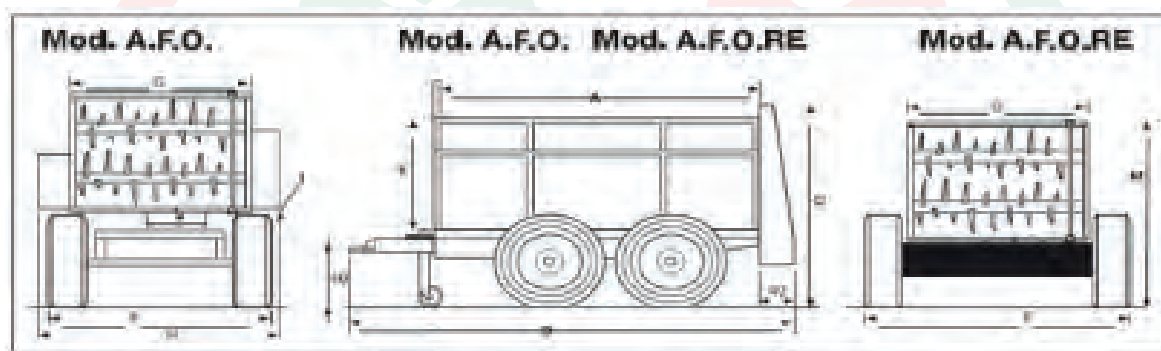
IMAGE	CODE	DESCRIPTION	PRICE
	SP 001	AXLE WITH MECHANICAL BRAKE	


BRAKING SYSTEM COMPULSORY FOR EUROPEAN ROAD HOMOLOGATION

	PNEUMATIC	
	HYDRAULIC WITH PEDAL	



MANURE SPREADER A.F.O. TA

- Rear spreading
- Cut-tube profiles structure with pickled sheet steel
- Deck and sides are made of treated larch planks
- With independent tandem suspension
- N° 2 balanced horizontal rollers for rear spreading
- Hydraulic chain feed
- Guides for chain running
- Removable drawbar
- Axle with mechanical brake
- Cardan shaft
- Road light kit
- Tractor n° 1 pair of hydraulic jacks for chains operation



MOD.	A mm	C mm	D mm	F mm	G mm	H mm	Y mm	TWIN WHEELS	m ³	Tare Kg		€	BRAKING SYSTEM COSTS
A.F.O.10 TA	3000	2200	4300	1050	850	1050	850	200/6014.5	2.0	1000	1300		
A.F.O. 15 TA	3000	2200	4300	1400	1150	1350	850	200/6014.5	2.8	1160	1700		
A.F.O.15 S TA	3500	2200	4800	1400	1150	1350	850	200/6014.5	3.3	1280	1700		
A.F.O. 25 TA	3000	2200	4300	1400	1250	1550	850	200/6014.5	3.0	1250	1900		
A.F.O. 25 S TA	3500	2300	4800	1550	1250	1550	850	10/075 15.3 - 12 PR	3.5	1380	1900		
A.F.O. 35 TA	3500	2300	4800	1600	1500	1800	850	10/075 15.3 - 12 PR	4.4	1560	2300		
A.F.O. 35M TA	4000	2300	5300	1600	1500	1800	850	10/075 15.3 - 12 PR	4.8	1650	2300		

COSTS OF BRAKING SYSTEM for 6000 Kg

	PNEUMATIC	
	HYDRAULIC WITH PEDAL	